


8" WD Rack, ball heights in drop and rise position


The distance between each increment on the adjustable shank is 1-1/2".

The distance between the highest setting in drop position and the lowest setting in the rise position is 3-7/8" (shown below in blue).

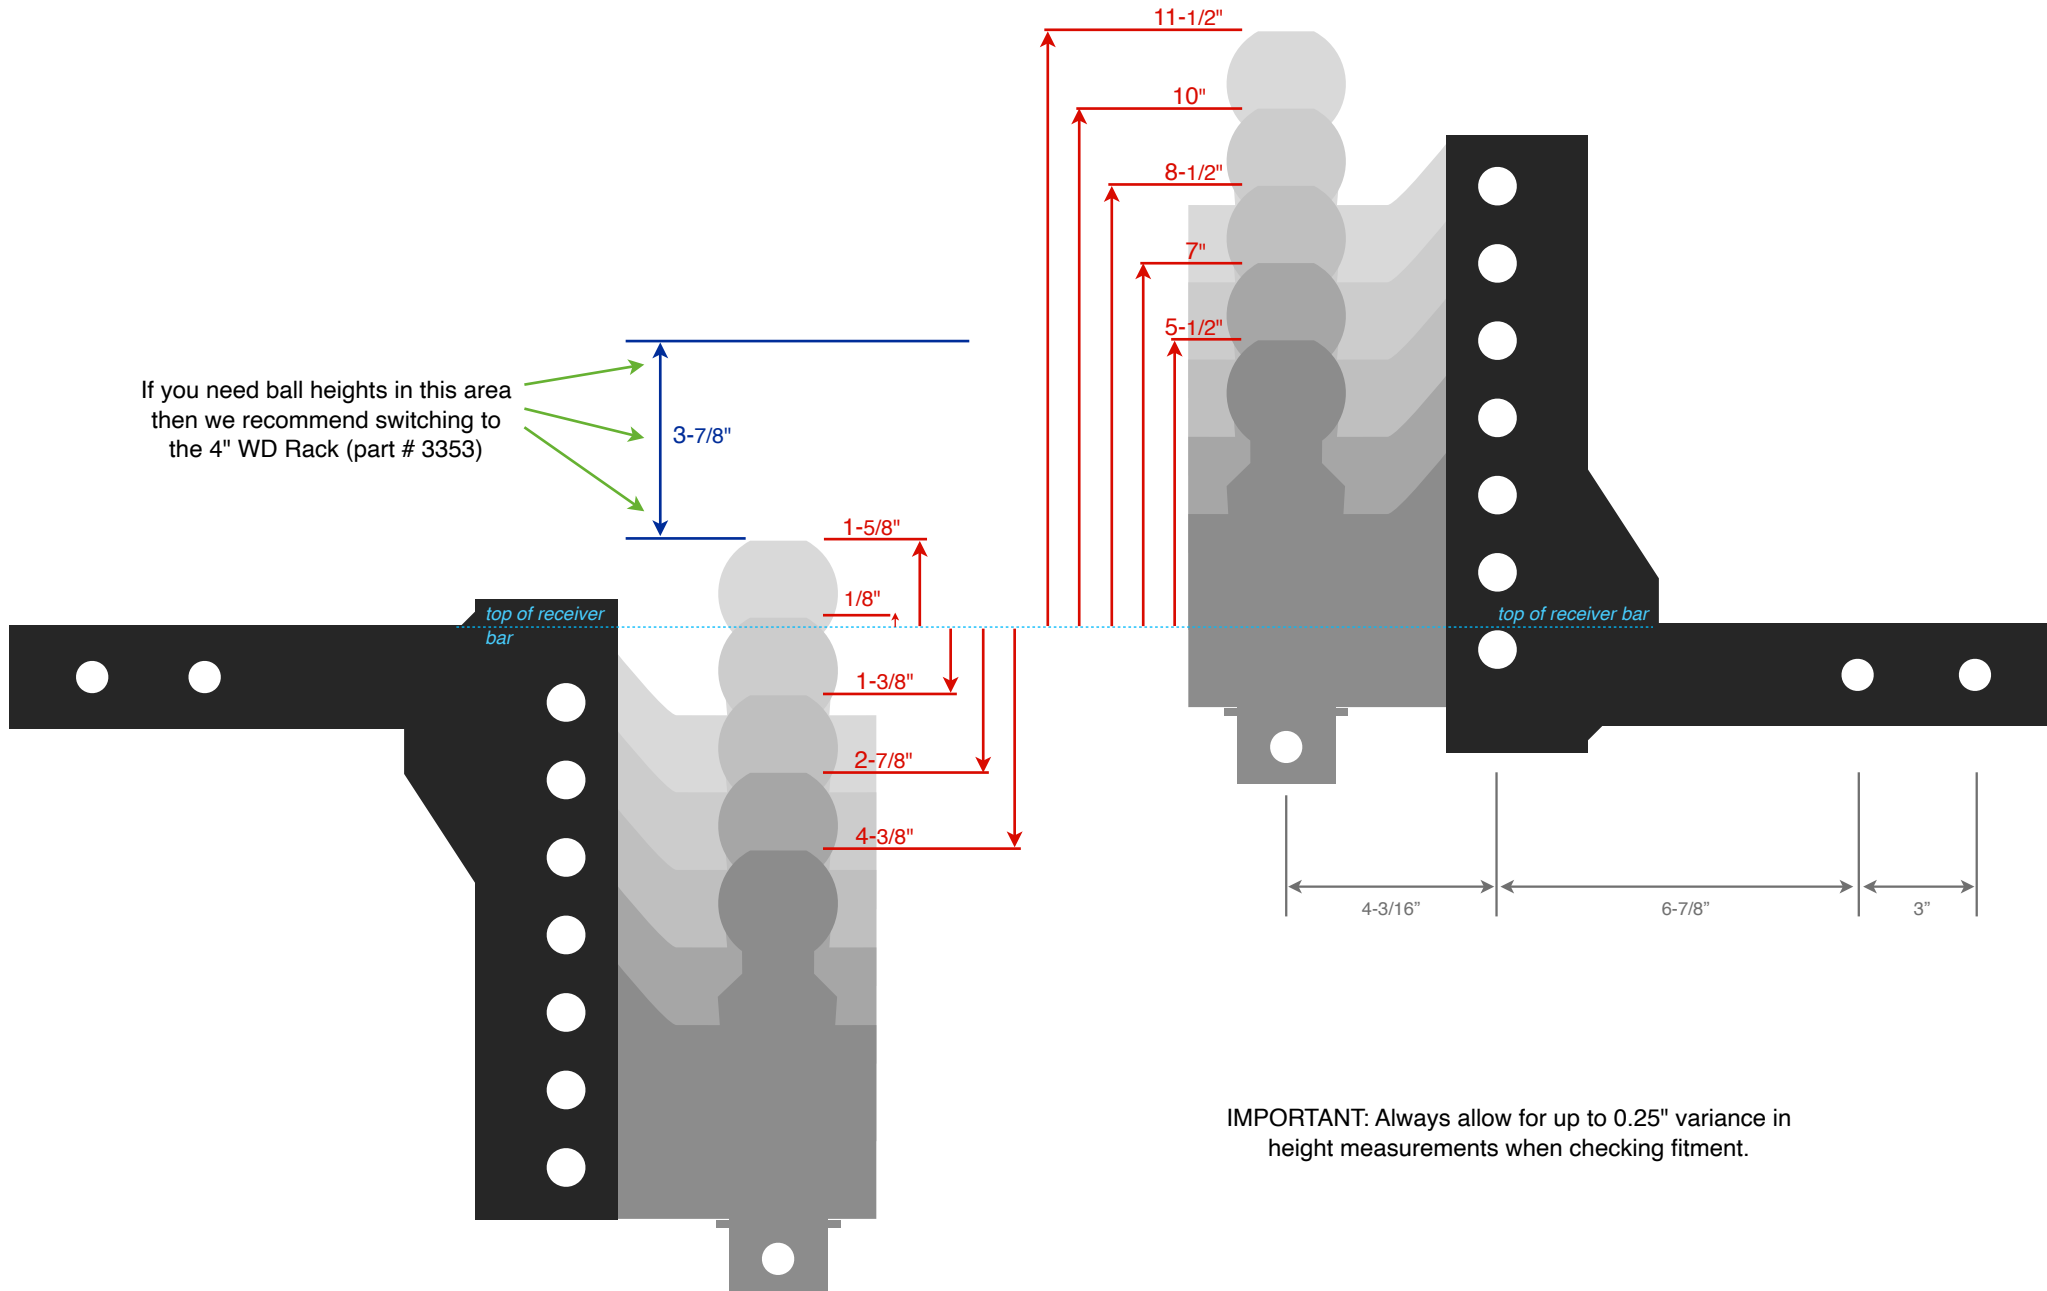


IMPORTANT: Always allow for up to 0.25" variance in height measurements when checking fitment.


Specs: WD Inside/Outside Brackets (part #3359)
for 3", 4", 5" and 6" trailer frames

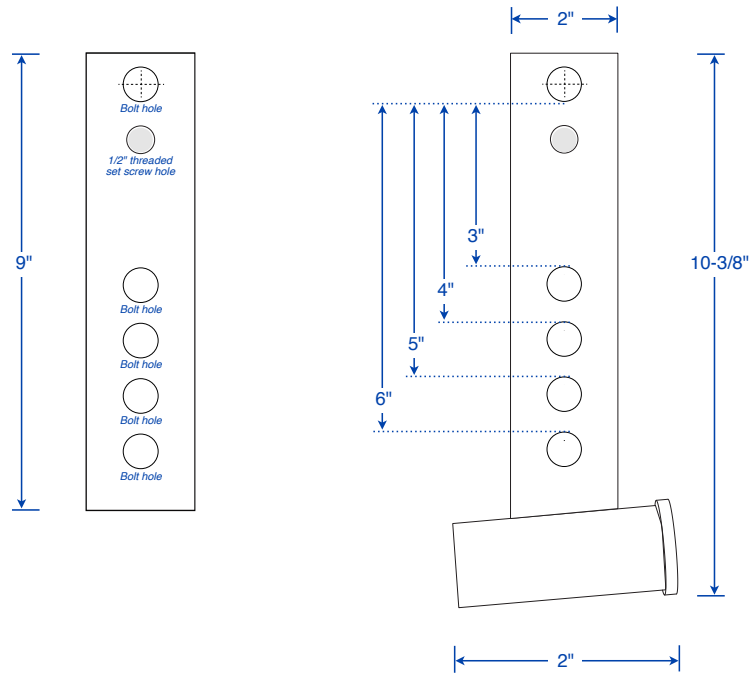



Specs: WD Inside/Outside Brackets (part #3361)
for 4-3/8" trailer frames

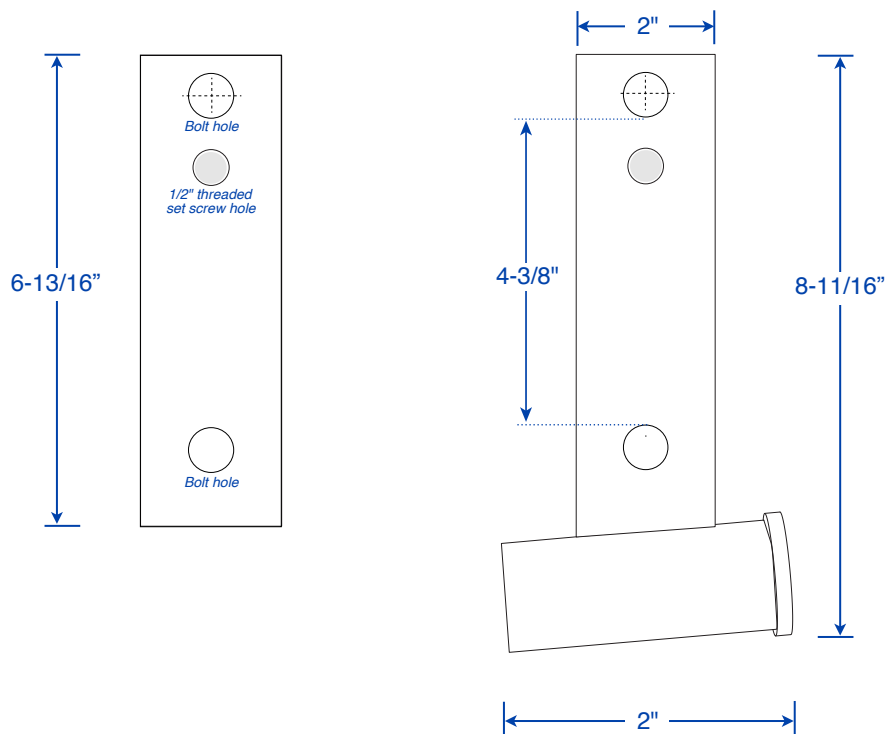


Specs: WD Inside/Outside Brackets (part #3359-XTD)
for EXTENDED UNIVERSAL 3", 4", 5" and 6" trailer frames
**used for underslung couplers*

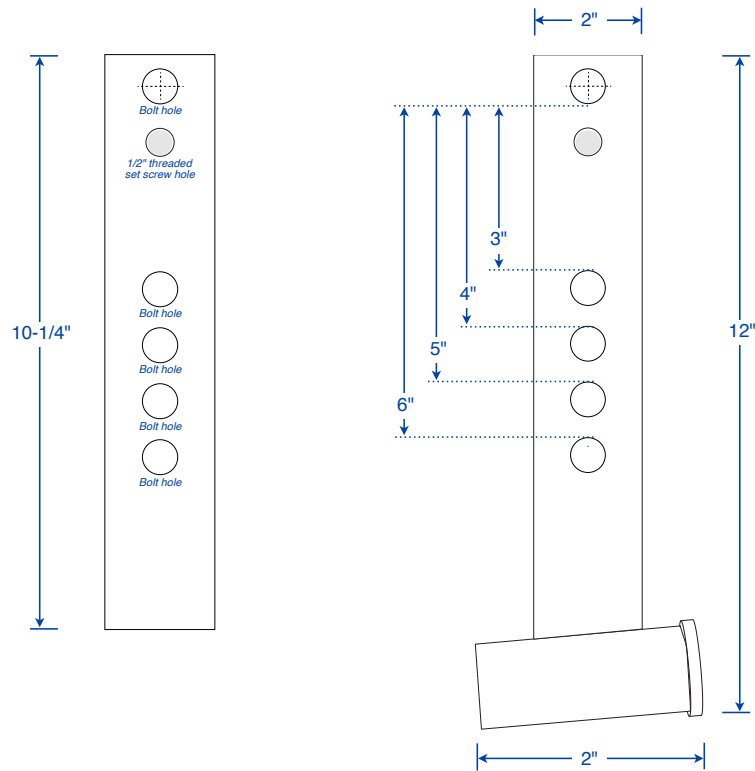

EXAMPLE: 3359-XTD INSTALLATION ON AN UNDERSLUNG COUPLER

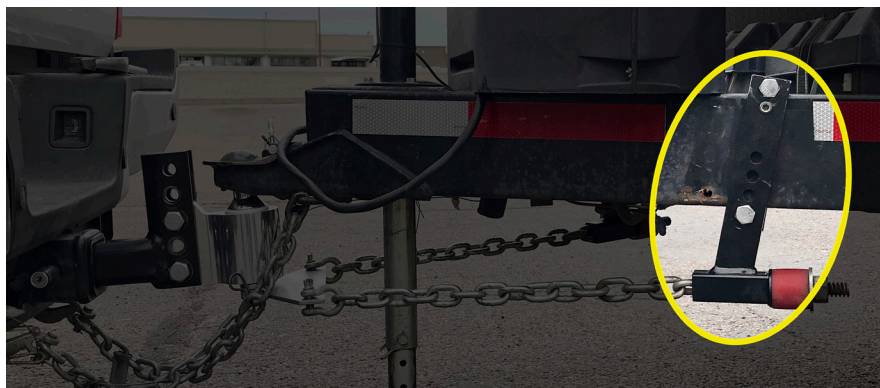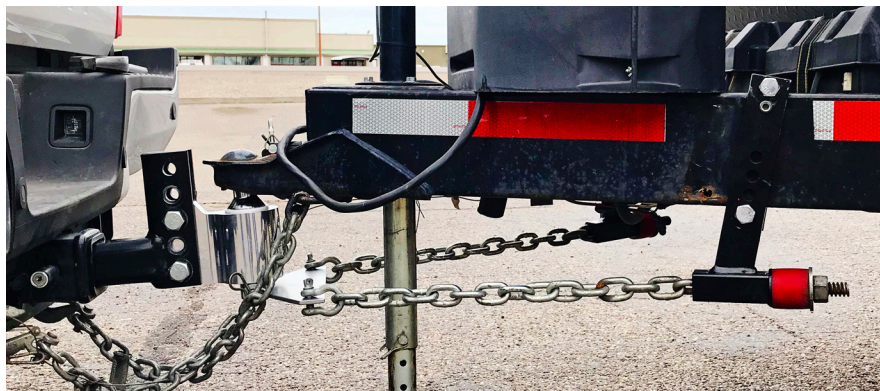

Specs: WD Inside/Outside RAISED Brackets (part #3369)
for low 3", 4", 5" and 6" trailer frames

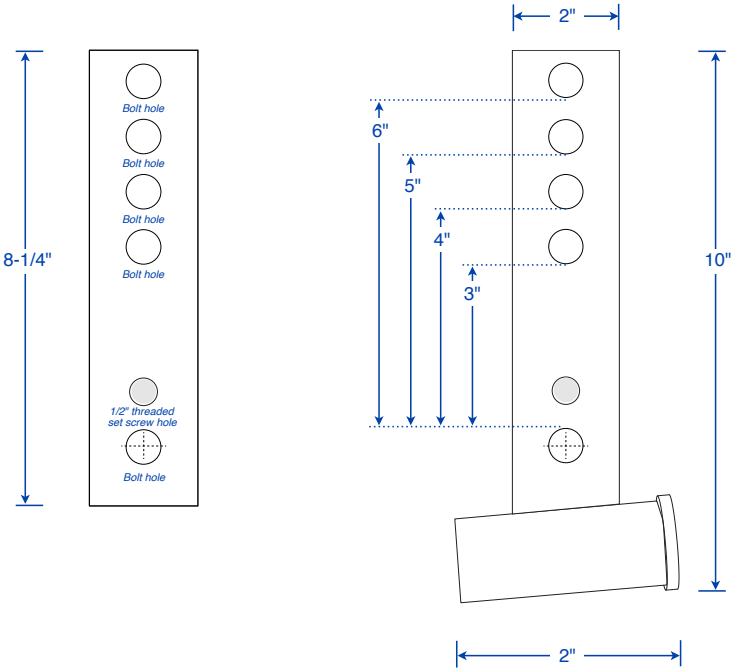

7"-8" WD Bracket set - part # 3387

